

American Tradition Flagpole Installation Instructions

INSTALLATION INSTRUCTIONS

Required Tools & Material for Install:

- (3) 80lb Bags of Concrete
- Shovel or Post Hole Digger
- Level
- Power Drill

Foundation:

Step 1: Dig hole with the top and bottom diameters as shown in the specifications diagram.

Step 2: Set sleeve plumb in wet concrete. Temporarily insert bottom section of pole in sleeve and check straightness with level. Let concrete harden.

NOTE: Place sleeve, then pour concrete outside of sleeve. Do not pour concrete inside of sleeve.

Pole Assembly:

Step 1: Assemble Shaft by sliding sections together as shown and described below.

NOTE: It is required that the sections be joined prior to erecting the pole. The 20' pole is 3 sections and the 25' is 4 sections.

Step 2: Mount ball on pole by screwing into top of truck, tightening with pliers or small pipe wrench.

Step 3: Run one end of the halyard through sheave (pulley) located in the truck (both ends to be rejoined at the cleat area).

Step 4: Attach snap hooks to halyard by inserting a loop of rope through the eye and pulling it tight over snap.

NOTE: Leave enough slack in halyard to run down pole to cleat. Locate second snap hook approximately 4"-10" below first snap hook using same procedure.

Step 5: Attach cleat using self-tapping screws. Tie ends of rope together and secure around cleat.


Step 6: Insert assembled Flagpole into ground sleeve.

Application Note:

This flagpole is not designed to withstand high winds while flying a flag. Always remove flag during high winds or inclement weather.

SPECIFICATIONS

Cone Tapered High Strength Aluminum Flagpole
Complete with all Fittings

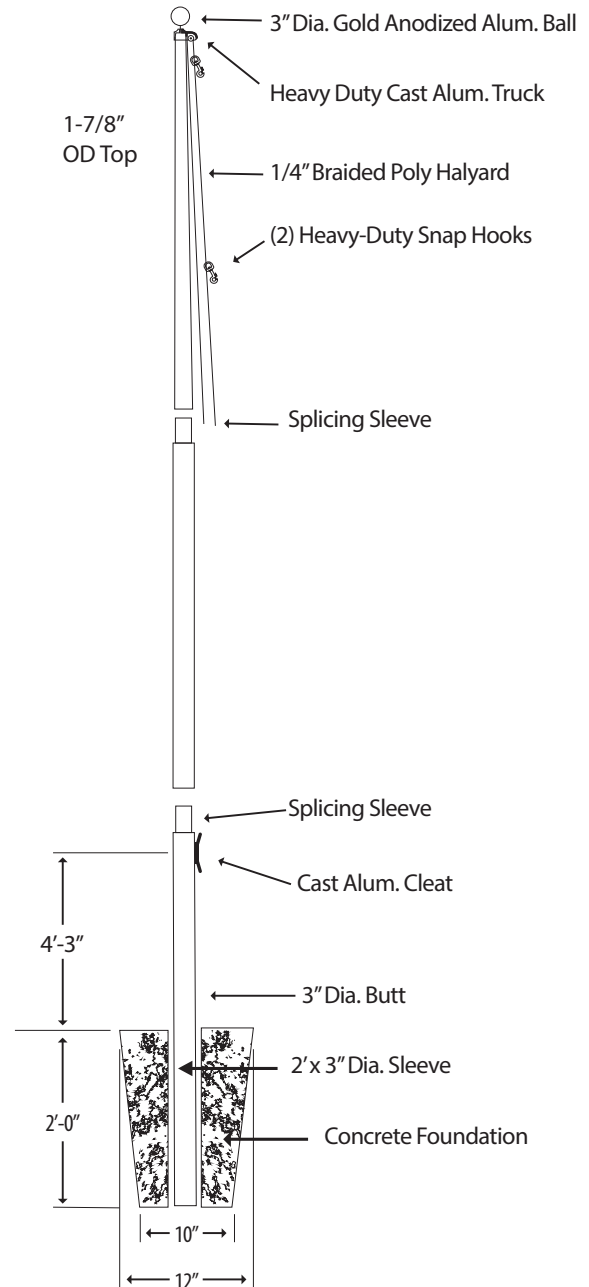

American Tradition Flagpole Installation Instructions



4155 Patriot Drive, Suite 100 • Grapevine, TX 76051